




## VIRTUAL POLYMER COMPOUNDS, LLC

10478 Ridge Road • Medina, New York 14103  
Phone: 585-735-9668 • Toll Free: 888-290-9522

Fax: 585-735-9965 • [www.virtualpolymercompounds.com](http://www.virtualpolymercompounds.com)

Administrative Office: One John James Audubon Pkwy • Amherst, NY 14228

# Enduro Model 150 Insulated Equipment Enclosure

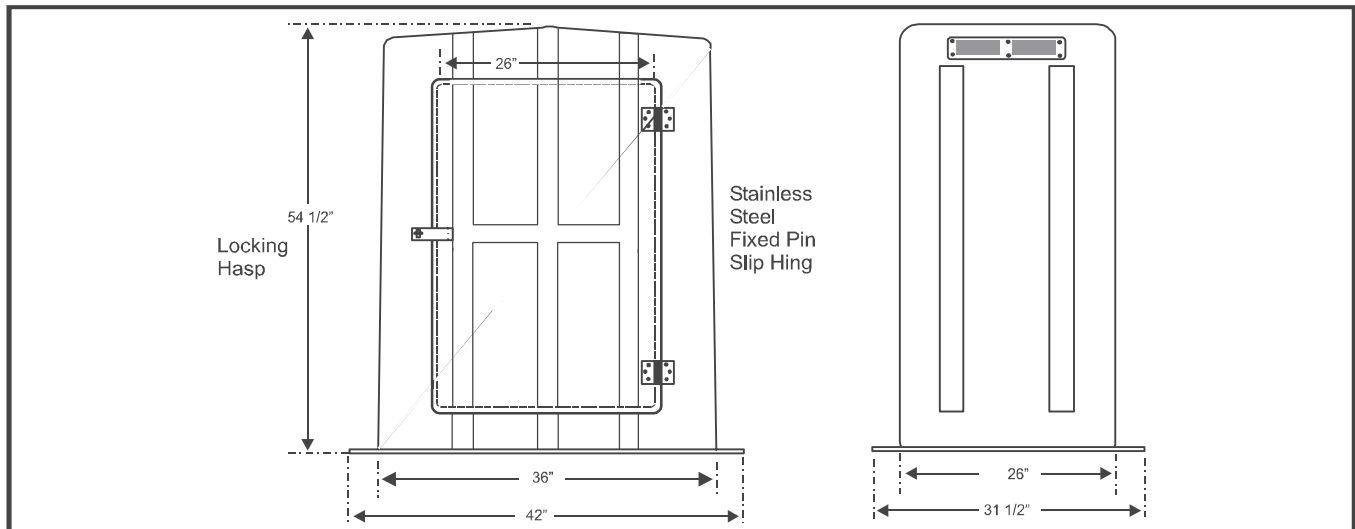

## DESIGN FEATURES

- **FULLY INSULATED** The “*ENDURO*” line of fiberglass enclosures are fully insulated with 1” of polyurethane insulation yielding an R Value of 7.1. The insulation is encapsulated between two layers of fiberglass laminate.
- **MAINTENANCE FREE-** The “*ENDURO*” line of fiberglass enclosures is virtually maintenance free. The exterior exposed surface in a high-grade polyester “gel coat” surface. This surface finish is especially design to withstand UV exposure and the harshest elements. This surface also resists air born contaminants typically found at most industrial and treatment sites.
- **STRUCTURAL LOAD-** The “*ENDURO*” line of fiberglass enclosures is built to meet all unified Building Codes. Wh en properly installed the unit will withstand I-90 wind loading and live loads up to 50 psf. Simply stated, the unit will handle the winds of the mid-west and the snows of Alaska.
- **SECURE-** The “*ENDURO*” Model 150 Shelters includes a standard Stainless Hasp/Latch system. The staple for the Latch rotates 90 degrees and accepts an owner supplied padlock.
- **FULLY ASSEMBLED-** The “*ENDURO*” line of fiberglass enclosures is shipped fully assembled and ready for installation. This assembly includes a basic

## TYPICAL OPTIONS

- **HEATER-** Base Board type 110 volt, 500 watt Heater with integral thermostat. Hazardous area Heater and remote thermostat are also available
- **EXHAUST FAN-** 60 CFM, 110 volt, “squire cage” type Exhaust fan with high temperature activated thermostat. Other size and type exhaust and intake fans are available. Door activated fan switch systems with thermostat lockout is available.
- **LIGHT AND SWITCH-** 60 Watt, incandescent, sealed light fixtures with plastic base assembly. Interior, exterior (weather proof) and door activated switches are available. Fluorescent lighting, exterior fixture and exterior Alarm Lighting available.
- **INTEGRAL FLOOR-** All units are available with fiberglass floor. The floor assembly is integral to the fiberglass interior wall and will serve as full containment. Floor can be smooth or have a slip resistant finish.
- **WINDOWS-** 12” by 12” window can be provided in the door or walls of the unit.
- **LOAD CENTER-** Standard, NEMA 3R and 4X load centers available with or without main and single pull commercial breakers.
- **WALL MOUNT PANEL -** Panel and strut can be laminated into the wall for easy and secure equipment mounting.